



Im Hofstätt 11 D-72359 Dotternhausen Tel +49 (0)7427 9480-0 Fax +49 (0)7427 9480-7025 e-mail info@proactiv-gmbh.de www.proactiv-gmbh.de

CE		
Quotation date: Consultation was carried out by Staff at the medical supplies shop:	SPEEDY F2 Easy-running rigid frame wheelchair with individual frame geometry made to measu permanently welded chassis Maximum user weight limit 120 kg	
☐ Order date: according to GTC PRO ACTIV Reha-Technik GmbH	A9015100000 € 5,370.00	
Medical suppliers / company address: Cust. no.: Name: Street: Postcode / city: Phone: Fax: E-Mail: Contact: Shipping address: Other (see below)	Invoicing address: same as company address other (see below) Cust. no.: Name: Street: Postcode / city: Phone: Fax: E-Mail: Contact:	
Name: Street: Postcode / city:	Note: We kindly would like to receive a picture of the customer in the wheelchair (the face can be blurred).	
Customer name / commission: Surname, forename: Street: Postcode / city: Phone:	Body size:	
Fax: E-Mail: D.O.B: Paying organisation:	Body height: cm Weight: cm Lower leg length: cm (anatomic dimension: hollow of the knee to the foot sole) Indication: This information is necessary for checking. If the information	



Individual frame geometry oversized:

A9015120000

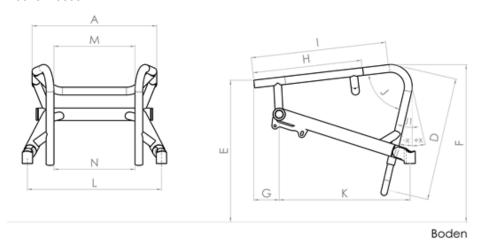

Standard equipment for the frame includes a base plate.

Equipment without base plate (explicitly requested)	A9015100001
For "equipment without base plate", no adaptations (anti-tipp	oing support, transit roller, wheelbase extension, etc.) can be retrofitted

Wheelchair dimensions:

A: SB Seat width	cm	H: Start frame retraction (I - min. 6 cm)	cn
B: ST Seat depth	cm	I: Frame length to the front frame bend (min. ST - 1 cm)	cn
C: RH Back height	cm	J: KW Knee angle or	o
D: USL Lower leg length	cm	J1: Angle of the front Framework tube to vertical	°
E: SHh Seat height back	cm	K: Position of the steering wheel bearing block	cn
F: SHv Seat height front	cm	L: Distance between steering wheel bearing blocks	cn
G: KP Tipping point (front side rear tube to axis middle drive wheel)	cm	M: Lower leg width top	cm
(mont olde real table to axis illiadic affective wheel)		N· Lower lea width button	cm

Note: In the case of oversized frame geometry, the seat tube is manufactured as standard from a seat tube angle of approx. 30° to the horizontal with a tube bend.

Dimensional tolerances according to DIN EN ISO 13920 apply for the design (dimensions in mm)

Degree of accuracy	Up to 30	More then 30 to 120	More then 120 to 400	More then 400 to 1000
С	+/- 1	+/- 3	+/- 4	+/- 6

Frame colour - one-colour design			
Information on current colour designs and example images at: www.proactiv-gmbh.de/farben.php			
Frame colour: Selection from colour pale	ette		
Frame colour will be specified with order A9000100170-000	Raw, blasted, not coated A9000100170-020 Note: In combination with moisture e.g. hand perspiration, can affect dark aluminum discoloration.		
Powder colours			
White RAL 9016 ☐ gloss A9000100170-023 ☐ matt A9000100170-123 € 42.10	Brillant silver gloss A9000100170-011	Anthracite RAL 7016	
Black RAL 9005 ☐ gloss A9000100170-003 ☐ matt A9000100170-019 € 42.10	Pure orange RAL 2004 ☐ gloss A9000100170-022 ☐ matt A9000100170-122	Pink magenta RAL 4010 ■ gloss A9000100170-037 ■ matt A9000100170-137 € 42.10	
Pastel blue RAL 5024 ☐ gloss A9000100170-036 ☐ matt A9000100170-136 € 42.10	Lemon green ☐ gloss A9000100170-005 ☐ matt A9000100170-105 € 42.10	Yellow RAL 1023 ☐ gloss A9000100170-046 ☐ matt A9000100170-146 € 42.10	
Red RAL 3001 ☐ gloss A9000100170-047 ☐ matt A9000100170-147 € 42.10	Lagoon blue ☐ gloss A9000100170-052 ☐ matt A9000100170-152 42.10	Athletic grey	
Muddy grey ☐ gloss A9000100170-051 ☐ matt A9000100170-151 € 42.10			
Powder colours "Dormant"			
Deep black effect silver gloss A9000100170-007	Sky blue gloss A9000100170-017	Navy blue	
Electric green ☐ gloss A9000100170-015 ☐ matt A9000100170-115 € 42.10	Violet ☐ gloss A9000100170-044	Fire red	
Frame colour - One-colour des	ign special colours "liquid coat	ting"	
€ 339.40			
Storm (ice blue) gloss A9000100170-500 matt A9000100170-501	Coffee ☐ gloss A9000100170-520 ☐ matt A9000100170-521	Prairie (rose gold) gloss A9000100170-504 matt A9000100170-505	
Pearl (mother of pearl-white) gloss A9000100170-524 matt A9000100170-525	Berry gloss A9000100170-526 matt A9000100170-527	Blue ocean gloss A9000100170-522 matt A9000100170-523	
Emerald gloss A9000100170-514 matt A9000100170-515	Mint gloss A9000100170-528 matt A9000100170-529	Chili gloss A9000100170-516 matt A9000100170-517	

Frame colour - Two-colour des		
Note: In the two-colour design, both colours are t	he same gloss level as the design colour.	
Two-colour design with one base colour (on the rear frame) and one design colour (on the front frame)		€ 260.70
Please select a color from below:		
Base colour (on the rear frame)		
White RAL 9016	Brillant silver	Anthracite RAL 7016
A9000100170-200	A9000100170-201	A9000100170-202
Black RAL 9005	Pastel blue RAL 5024	Lemon green
A9000100170-203	A9000100170-206	A9000100170-207
Yellow RAL 1023	Lagoon blue	Athletic grey
A9000100170-208	A9000100170-212	A9000100170-210
Muddy grey		
A9000100170-211		
Design colour (on the front frame)		
Black RAL 9005	Lemon green	Chili
gloss A9000100170-259	gloss A9000100170-250	gloss A9000100170-253
matt A9000100170-260	matt A9000100170-251	matt A9000100170-254
Bure erenge BAL 2004	Coffee	Mint
Pure orange RAL 2004		
☐ gloss A9000100170-255	gloss A9000100170-278	gloss A9000100170-286
matt A9000100170-256	matt A9000100170-279	matt A9000100170-287
Emerald	Storm (ice blue)	Prairie (rose gold)
gloss A9000100170-274	gloss A9000100170-264	gloss A9000100170-266
matt A9000100170-275	matt A9000100170-265	matt A9000100170-267
Pearl (mother of pearl-white)	Berry	Blue ocean
gloss A9000100170-282	gloss A9000100170-284	gloss A9000100170-280
matt A9000100170-283		
	matt A9000100170-285	matt A9000100170-281
Colour - Attachment parts		
Note: If not specified, the caster fork and bearing		
Drive wheel: aluminum rim, hub and spokes	Caster fork and bearing block Silver A9000100173-011	
Black A9000100171-003	Black A9000100173-003	
	s according to customer request:	
Drive wheel: Aluminium rim and design inlet ¹	Caster wheel: 5" aluminium rim ² (3-spoke design)	
☐ Frame colour	☐ Frame colour	
A9000100171-999 € 242.30	☐ Frame Colour A9000100174-999 € 73.00	
Select from one-colour	Select from one-colour	
design (different from the frame color)	design (different from the frame color)	
A9000100171-998 € 280.50	A9000100174-998 € 84.60	
Colour:	Colour:	
A9000100170-	A9000100170-	
Special colour requests (frame	. ,	DAL
Frame colour for single purchasing Selection from RAL colour palette	Gloss level colour name	RAL number
A9000100170-100 € 402.30	☐ gloss	
	matt —	
Note: attachment parts are not possible in desig		
¹ Only in conjunction with Liteline hub (with drive wh ² Only in conjunction with caster wheel 5" aluminum A900500160*	eel aluminum rim with 18 or 36 spokes, single rim) rim 3-spoke design good shock absorption A9000501	21*, as well as with suspension fork 5-spoke design

- 4 - 2024-06-01 / The prices are plus statutory value-added tax and shipping costs Order sheet colours Rev. 04 UK


Push handles		
Back tube with integrated handles	Aluminum push handles fixed in back tube	Horizontal push handles screwed into the back tube
☐ A9000401051-K € 126.60 straight	☐ A9000401050 € 126.60 from RH 23 cm	☐ A9000401076 € 234.80 can be unscrewed
Safety push handles height adjustable	Safety push handles back-positioned length 45 cm	Equipment without push handles
A9000401060* € 210.10 Mount in the back tube from RH 30 cm with adaptable back from RH 35 cm for back tube with lordosis support from RH 43 cm with back shell	A9000401075 € 362.00 continuous height adjustment, Safety push handle holder mounted on the back cross bar Up to SB 42 cm or body weight 95 kg Not in combination with swing-away armrest	A9000401000
Backrest		
Aluminum side guard, contour following the wheel	Aluminum side guard, contour by indicated dimension	Aluminum side guard, with bolted clothing guard
A9015402470-002	☐ A9015402470-001 € 162.80	☐ A9015400025 € 350.70
Backrest screwed, not foldable, back angle 90° to the floor Adapted to the upper edge of the tyre	Bolted backrest, cannot be folded Indicated dimension: A = cm / B = cm	Bolted backrest, cannot be folded Wheel cover runs parallel to the contour to the drive wheel tyres at a Distance of approx. 8 to 12 mm
61		
Aluminum side guard, with integrated clothing guard	Carbon side panel, with integrated clothing guard	
☐ A9015400026 € 637.70	☐ A9015400028 € 877.90	
Clothing guard and side panel in one piece, individually manufactured, coated in frame colour. Permanently bolted backrest, cannot be folded, Wheel cover runs parallel to the contour to the drive wheel tyres at a Distance of approx. 8 to 12 mm	Clothing guard and side panel in one piece, individually manufactured. Permanently bolted backrest, cannot be folded, backrest angle 90° to the floor, wheel cover runs contour-parallel to the drive wheel tyres at a distance of approx. 8 - 12 mm	

Folding backrest	Back tube with lordosis support	
A9000400011 7-way angle adjustable, with integrated plastic-coated aluminum side parts	☐ A9000400005-K € 111.10 ☐ 1 cm ☐ 2 cm ☐ 3 cm	
Back equipment If not specified, the "Adaptable back with back pa	dding" will be delivered.	
Adaptable back with back padding	Equipment without back upholstery	
A9000802010-K	and back padding or back system	
Cover: Black, breathable, open surface Equipment with back cross bar	A9000802011 € - 53.00 Equipment with back cross bar	
For other back systems for example ergo separate order sheet: "PRO ACTIV seat a	onomic back shell, see and back systems"	
Seat upholstery If not specified, the "Body Contour seat upholster	v" will be delivered.	
Body Contour	Open belt system	Equipment without seat upholstery
A9000801025-K approved up to a body weight of 120 kg	☐ A9000801010-K € 74.70	A9000801050
Sitzkissen		
	Radius	
SB SB	TS SB	
Seat cushion for individual frame geometry in rectangular contour Inlet: Standard	Seat cushion for individual frame geometry with radius contour Inlet: Standard	Seat cushion height: 3 cm 5 cm
☐ A9000805190-K € 156.70	☐ A9000805320-K € 200.10	☐ 4 cm ☐ 6 cm

Seat cushion for individual frame geometry in rectangular contour Inlet: Anti-Decubitus	Seat cushion for individual frame geometry with radius contour Inlet: Anti-Decubitus	Seat cushion height:	
☐ A9000805210-K € 467.40	☐ A9000805310-K € 510.40	☐ 6 cm	
Cover: Black, breathable, open surface Black, breathable, closed surface If no specification is made, the cover material "Bl	ack, breathable, open surface" will be delivered.		
☐ Seat cushion is existing			
	our separate order sheet: "PRO ACTIV sea	t and backrest systems"	
Clothing guard		_	
Aluminum clothing guard removable via Adjustable following wheel arch Only in combination with folding backrest	lock function		
in anthracite matt	in frame colour (basic colour with two-colour design)	in design colour (only possible with frame colour in two-colour design)	
☐ A9000403215-K € 236.10	☐ A9000403216-K € 302.00	☐ A9000403217-K € 335.00	
Carbon clothing guard removable via lock function			
☐ A9000400013-K € 547.30			
Adjustable following wheel arch Only in combination with folding backrest			
9			
Wheelbase extension			
Wheelbase extension, angle-adjustable and removable	Wheelbase extension permanently welded		
☐ A9015100005 € 711.20 with continuous axle tube, height adjustment via gear joint	A9015100002 € 613.20 with second axle tube, 1°/4° or 6° camber integrated.		
adjustable in 6° angular increments wheel position displacement approx.14 cm	distance between axle tubes 150 mm as standard, other distances according to		
4°/6° camber integrated, adjustable track Attachment possibility must be checked by	drawing set Track can be adjusted independently		
PRO ACTIV. Only in combination with base plate. Up to 120 kg load capacity.	Version must be checked by PRO ACTIV Only possible without base plate		
	150		
Wheel camber *Total width with tight mounted handrim			
*Total width with tight-mounted handrim. 1° drive wheel camber	2,5° drive wheel camber	4° drive wheel camber	
A9016202010	A9016202051	A9016202030	
Total width = approx. SB + 20 cm*		Total width = approx. SB + 26 cm*	

6° Antriebsradsturz			
A9016202040 Total width = approx. SB + 30 cm	*		
Brake system			
		ith standard brake handle" will be delivered. ommend the "Brake system push to lock with brak	e handle 20° outwards".
Integral parking brake posit lower frame tube	ioned on	Integral parking brake positioned on upper frame tube	Brake system push to lock Standard brake handle
☐ A9015705001	€ 520.90	A9015705000-K € 514.40 Please note: In order to maintain the function of the foldable backrest, the plastic-coated side part version is mounted "-5", guided low by the contour, thus preventing collision with the integral brake when the backrest is folded down.	A9000701010-001
			RC ACTIV
Brake system push to lock Long brake handle		Brake system push to lock Low brake handle	Brake system push to lock Brake handle 20° outwards
A9000701010-002		A9000701010-003	Standard brake handle
			A9000700002 Long brake handle A9000701010-004
PR AS		PR ACTIV	
Brake system push to lock Brake handle to flip-down		Brake system push to lock with cable pull operation	
A9000706008 Length: 9 cm	€ 154.00	A9000700001 € 335.70 Brake mounted on the bottom frame tube. Operation via Bowden cable, operating handle mounted on the seat tube in the area of the frame bend Attachment possibility must be checked by PRO ACTIV individually	
ORC TIV			

Footrest If not specified, the "continuous footrest" will be o	lelivered.	
Continuous footrest	Footrest folds up to the rear with	Footrest folds up to the rear
A9016601010-K* with tubular resting bracket height adjustable +/- 3 cm If the footrest is wanted with a "rubber coated footplate", please select this under "Footrest accessories"	spring locking mechanism A9016602005-K* € 279.00 with tubular resting bracket from USL 40 cm only with V-shape and long frame If the footrest is wanted with a "rubber coated footplate", please select this under "Footrest accessories"	A9016602010-K* € 298.90 with tubular resting bracket and 20 mm operating lever If the footrest is wanted with a "rubber coated footplate", please select this under "Footrest accessories"
Footrest accessories		
Rubber coated footplate	Footrest side stop	
A9000610000-K € 122.20 bolted, angle-adjustable Depth: 14 cm	A9000610100 € 58.00 adjustable only in combination with rubber coated footplate	
PROACTIVE /		
Adaptations		
Anti-tipping support	Transit wheels	Tilting clamp
right side A9000300100-K003 € 182.40	☐ A9000301100 € 320.00 with universal adapter, removable	right side A9000302101-001 € 136.00
☐ left side A9000300100-K004 pivotable, screwed to the welded base plate with tension spring Not in combination with other removable wheelbase extension.	not in combination with anti-tipping support	left side A9000302101-002 with universal adapter and Quick pin not in combination with anti-tipping support, right side or left side
4 Dance central anti-tipping support		
A9000300010 € 502.30 removable via quick release lever with rotating caster fork and skate wheel Ø 80 mm adjustable ground clearance and angle Colour: black		

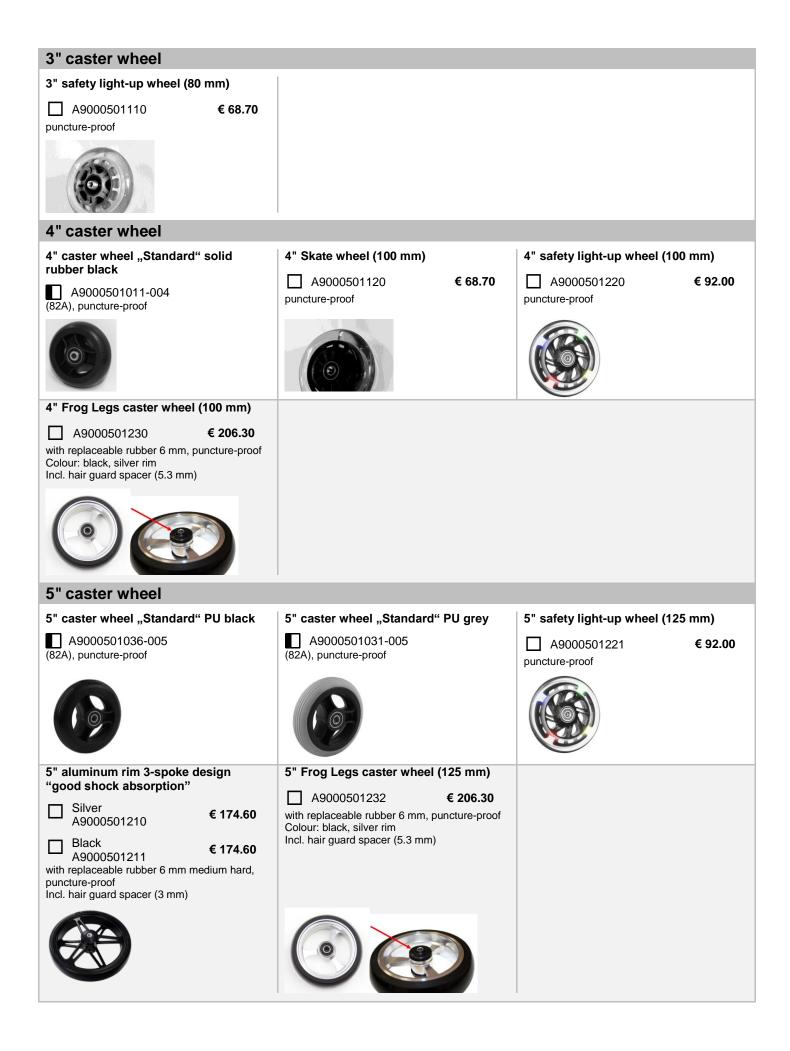

6" caster wheel		
6" caster wheel "Standard" PU grey	6" caster wheel "pneumatic tyre"	6" caster wheel "Flexel System"
A9000501010-006 (82A), puncture-proof	☐ A9000501050 € 55.50	☐ A9000501070 € 55.50 puncture-proof
Caster fork		
If not specified, the "standard caster fork with screen	ew axle" is supplied.	
Caster fork Standard	Caster fork short	Caster fork Heavy Duty
A9000500100-K001 with screwed axle	A9000500110-K001 with screwed axle	for high loads Extra weight approx. 100 - 150 gr.
☐ A9000500100-K002 € 162.50	Not in combination with 6" steering wheels A9000500110-K002 € 162.50	☐ A9000510111-K001 € 52.40 with screwed axle
with quick-release axle	with quick-release axle	☐ A9000510111-K002 € 212.50
	Not in combination with 5" or 6" caster wheels	with quick-release axle
	8	
Caster fork Heavy Duty short for high loads	Suspension fork inkl. 5" aluminum rim "good shock absorption"	
☐ A9000510120-K001 € 52.40	☐ A9000500160-K002 € 598.90	
with screwed axle Not in combination with 6" steering wheels	with quick-release axle	
☐ A9000510120-K002 € 212.50		
with quick-release axle Not in combination with 5" or 6" caster wheels		
Caster fork spare wheel "Standard"	Caster fork spare wheel "Heavy Duty"	The spare caster fork does not have a caster
☐ A9000500300-K € 288.10	☐ A9000500301-K € 328.10	wheel. In case a caster wheel is requested, please put
Caster fork Standard with quick-release axles	Caster fork Heavy Duty with quick-release axles	a cross on a second selection in the category "Caster wheels".

Drive wheels

Information about other rim types, designs and availability can be found at: www.proactiv-gmbh.de. If not specified, the "drive wheel 36 spokes aluminum rim" will be delivered.

Drive wheel 18-spoke aluminum rim

24" (ETRTO 540) A9000203122

with Liteline hub, radially spoked Not in combination with:

- Puncture-proof tyres
- One-hand drive
- Drum brake
- Handbike

up to 70 kg body weight:

Sturz	1°	4°	6°	8°	10°
Gewicht					
bis 50 Kg	~	~	~	~	~
51 - 60 Kg	~	1	~	~	
61 - 70 Kg	~	~			



Spinergy wheel "Spox Sport" with 24 PBO spokes; rim, hub and spokes in black

24" (ETRTO 540) A9000203550

€ 761.30

25" (ETRTO 559) A9000201559

€ 761.30

26" (ETRTO 590) A9000203555

€ 761.30




Drive wheel 36-spoke aluminum rim

24" (ETRTO 540) A9000203000-010

with Liteline hub (left image), radially spoked up to 120 kg body weight

24" (ETRTO 540) A9000203000-020

with aluminum front hub (right image), radially spoked over 120 kg body weight



24" (ETRTO 540) A9000203100

€ 153.20

25" (ETRTO 559) A9000203200

€ 153.20

26" (ETRTO 590) A9000203300

€ 153.20

with aluminum front hub, radially spoked

Use with higher loads and body weight

> 120 kg




Spinergy "Everyday Light Extreme" with 12 PBO spokes; rim and hub in black, spokes in white

24" (ETRTO 540) A9000203554

€ 929.30

Recommendation: up to 70 kg body weight, not in combination with handbike/traction device use.





24" (ETRTO 540) A9000203552

€ 929.30

Recommendation: up to 70 kg body weight, not in combination with handbike/traction device use.

Handrims				
x = dimension handrim attachment				
Handrim attachment general: Handrim attachment Curve + Gekko handrim:				
If not specified, the handrim will be r	nounted wide			
Stainless steel Ø 20 mm 24" handrim for 24" wheel and 25" wheel A9000205010-004 26" handrim for 26" wheel A9000205010-006		Aluminum Ø 19 mm silver anodised 24" handrim for 24" wheel and 25" wheel A9000205019-004		Aluminum Ø 19 mm powder coated in frame colour (basic colour with two-colour design) □ = Gloss surface □ = Matt surface Note: Matt coating is not recommended due to the low grip. □ 24" handrim for 24" wheel and 25" wheel € 66.30 A9000205020-004 □ 26" handrim for 26" wheel € 66.30 A9000205020-006
Aluminum Ø 19 mm		Titanium Ø 19 mm		Silicone handrim cover
polished and hard-anodised				
24" handrim for 24" wheel and 25" wheel A9000205030-004 26" handrim for 26" wheel A9000205030-006	€ 160.10 € 160.10	24" handrim for 24" wheel and 25" wheel A9000205040-004 26" handrim for 26" wheel A9000205040-006	€ 325.80 € 325.80	for 24" handrim A9000205100-004 ∫ for 26" handrim A9000205100-006 Surface without structure, compatible with handrim Ø 19 mm or Ø 20 mm. € 226.00
				1
Ultra-Grip "very grippy"		Ergo-Grip		Curve black anodised,
24" handrim for 24" wheel and 25" wheel A9000205070-004	€ 390.70	24" handrim for 24" wheel and 25" wheel A9000205080-004	€ 396.80	ergonomic handrim profile 24" handrim for 24" wheel and 25" wheel H 24 mm € 389.10
26" handrim for 26" wheel A9000205070-006	€ 390.70	26" handrim for 26" wheel A9000205080-006 Attachment fitting to the rim	€ 396.80	A9000205130-004 24" handrim for 24" wheel and 25" wheel H 31 mm, size L A9000205140-004 € 389.10
				26" handrim for 26" wheel H 31 mm, size L A9000205140-006 € 389.10

Curve silver anodised ergonomic handrim profile	Curve powder-coated, ergonomic handrim profile	Curve Grip, with Tetra-Grip coating, ergonomic handrim profile
24" handrim for 24" wheel and 25" wheel H 31 mm, size L € 394.30	☐ = Frame colour (gloss surface) ☐ = Black (gloss surface)	24" handrim for
A9000205160-004	24" handrim for 24" wheel and 25" wheel H 24 mm A9000205135-004 € 454.00	H 31 mm, size L A9000205150-004
	24" handrim for 24" wheel and 25" wheel H 31 mm, size L A9000205145-004 € 454.00	
	26" handrim for 26" wheel H 31 mm, size L A9000205145-006	
	Profilhöhe H: 24mm oder 31mm	
Quadro with Tetra-Grip coating	Gekko black anodised	Gekko silver anodised
24" handrim for 24" wheel and 25" wheel € 517.50	24" handrim for 24" wheel and 25" wheel € 501.20 A9000205175-004	24" handrim for 24" wheel and 25" wheel € 513.20 A9000205185-004 with a robust and replaceable silicone lip, fully
A9000205170-004 25" handrim for 25" wheel € 517.50	25" handrim for 25" wheel € 501.20 A9000205175-005	integrated into the profile
A9000205170-005 26" handrim for 26" wheel € 517.50 A9000205170-006	26" handrim for 26" wheel € 501.20 A9000205175-006 with a robust and replaceable silicone lip, fully integrated into the profile	
Gekko S black anodised	Equipment without handrims	
24" handrim for 24" wheel and 25" wheel € 501.20 A9000205195-004 with a robust and replaceable silicone lip, fully integrated into the profile Profile height 24 mm	A9000205990	

Spoke guard		
Finger- and spoke guard "transparent"		
☐ for 24" wheel		
for 26" wheel A9000206300-006 Not in combination with Spinergy drive wheels.		
Not in combination with Spinergy drive wheels.		
Tyres		
If not specified, the "Schwalbe RightRun in black		
Schwalbe "RightRun" High-pressure tyres	Schwalbe "RightRun" High-pressure tyres	Schwalbe "DownTown" Profiled tyres
24x1" (540-25) A9000204001-004	24x1" (540-25) A9000204000-004	24x1" (540-25) A9000204010-004
Colour: Black 7.5 bar	25x1" (559-25) A9000204000-005	7.5 bar
	26x1" (590-25) A9000204000-006	
	Colour: Grey, black wall 7.5 bar	
	O by foat bases Greate.	(C) by Kell Bullet Gradel
Schwalbe "Marathon Plus Evolution" with "smart guard" puncture protection	Schwalbe "Marathon Plus" with "smart guard" puncture protection	Schwalbe "One" □ 24x1" (540-25)
☐ 24x1" (540-25) A9000204030-014 € 47.80	☐ 24x1" (540-25) A9000204030-004 € 47.80	A9000204123-004 Colour: Black 9 bar
☐ 25x1" (559-25) A9000204030-015	Colour: Grey, black wall 10 bar	
☐ 26x1" (590-25) A9000204030-016 Colour: Black 10 bar		
Ci by Red Balan Great	City Part States Create	
Puncture-proof "solid rubber tyres"		
24x1" (540-25) A9000204201-004 Colour: Black Not in combination with 18-spoke drive wheel, Spinergy and one-hand drive		

Accessories		
24" MTB spare wheel set		
with double rim (ETRTO 507), aluminum front hul Mountain bike tyres, selectively:	b, quick-release axle and stainless steel handrim	
☐ A9000203410 € 682.90	☐ A9000203413 € 682.90	
24x1.75" Schwalbe "Marathon Plus" Brake setting compatible with 24x1" wheel	24x2.1" Schwalbe "SMART SAM Sport" Brake setting not compatible with 24x1" wheel	
Through axle with assistance, Large push button	Lockable drive wheel axle clip "Tetra Clip"	Hand air compressor with pressure gauge
☐ A9000200096 € 102.70	☐ A9000206400 € 161.60	☐ A9000901100 € 103.20
Interlock dimension: 122 / 110 mm Axle diameter: 12 mm	Not in combination with Spinergy drive wheels, one-hand drive, drum brake or Liteline hub	up to 14 bar
Not in conjunction with lockable drive wheel axle clip "Tetra Clip", not in combination with one-hand drive	one name anno, aram prate or Etomo nap	
910		-1
18		
Length-adjustable safety belt with buckle	Adjustable safety belt with hook and fastener	Crutch holder with flexible nylon cup
☐ A9000902100 € 78.30	☐ A9000902110 € 62.60	☐ A9000902310* € 133.40
SIGMA lighting set	Transport bag for drive wheels	
☐ A9000903270 € 104.80	for 24" wheel A9000903530-004 € 75.50	
Consisting of front light and rear lights, chargeable via Micro USB socket,	A9000903530-004 € 75.50 Ø 76 cm x 2 cm	
incl. Micro USB charging cable	for 26" wheel	
Lighting set compliant with road traffic regulations	A9000903530-006 € 75.50 Ø 83 cm x 2 cm	
	РИСИСТИ	

Further accessories (such as handbikes, steering attachments, etc.) see separate order form or www.proactiv-gmbh.de.

Notes and remarks:	
Location, Date The signature field is intended for the consultant and insured person.	Signature End customer/dealer This confirms that the intended equipment is intended for the insured person.